


# HOW TO LOCK YOUR BIKE

## Locking Checklist

- ☑ Lock to a bike rack or other immovable post.
- ☑ Lock the bike frame and both wheels using the rear triangle and a hardened steel U-lock. Do this in one of three ways:

## Option 1: U-lock + Removing the Front Wheel

- 1 Use the **Quick Release** to remove your front wheel and place it next to your rear wheel.
- 2 Loop **U-lock** through rear triangle so that you can lock the rear wheel, frame, and rack all in one go.
- 3 Use a **locking bolt** or **small chain** to lock the seat to the bike frame.

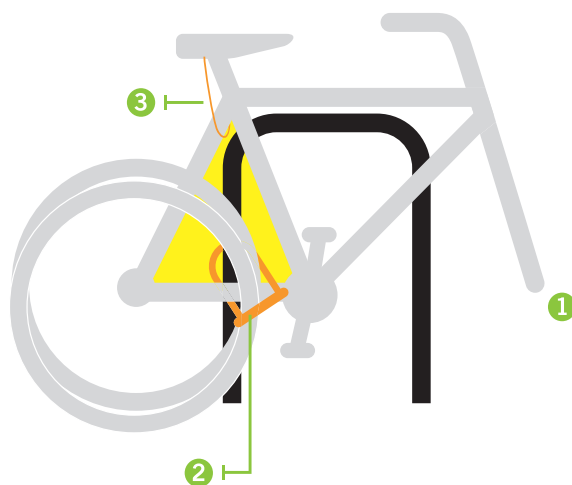

## Option 2: U-lock + Locking Skewers

- 1 **Locking skewers** replace quick releases as the axle connecting your wheel to the frame. They usually require a **special tool**, specifically fitted to your skewers, to unlock. Using locking skewers protects your wheels without requiring an accessory cable.
- 2 Loop **U-lock** through rear triangle so that you can lock the rear wheel, frame, and rack all in one go.
- 3 Use a **locking bolt** or **small chain** to lock the seat to the bike frame.



## Option 3: U-lock + Accessory Cable

- 1 Loop **U-lock** through rear triangle so that you can lock the rear wheel, frame, and rack all in one go.
- 2 Use an **accessory cable** to secure your front wheel.
- 3 Use a **locking bolt** or **small chain** to lock the seat to the bike frame.

